

DEC
2011

 Fenner Drives®



Conveying Solutions for your
Tile Manufacturing Plant


EAGLE® Red 90

Suitable for use with heavy loads and in abrasive operating environments; the perfect solution for roof tile conveying.

- 90 Shore A Durometer available non-reinforced or reinforced
- Solid polyurethane construction
- Lower coefficient of friction than Eagle Orange 85
- Easily welded endless on site with a Fenner Drives Welding Kit



EAGLE® Red 90 SGT PVC

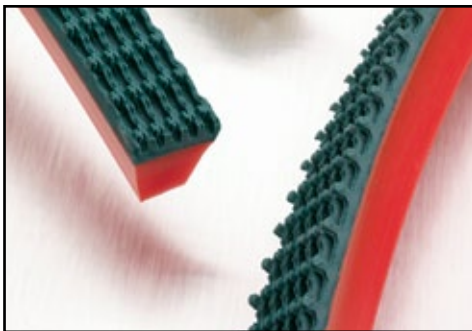

High-grip, low-wear PVC SuperGrip Top is ideally suited for ceramic conveying applications.

- SuperGrip Top surface is integrally bonded and cannot delaminate
- 90 Shore A Durometer base available non-reinforced or reinforced
- Perfect for conveying on inclined and declined surfaces
- Custom top surfaces available on request

EAGLE® Ivory 85 SGT PU

Specifically engineered for superior wear and abrasion resistance for roofing and ceramic tile conveying.

- 85A Polyurethane base with a 70A Polyurethane SuperGrip Top for greater wear resistance
- Lasts at least 3x longer than PVC SuperGrip Top in heavier duty applications
- Ideal for inclines or declines in the ceramic and roof tile sectors
- Available non-reinforced or reinforced




As your one-stop shop for all of your manufacturing and conveying needs, we also offer long-wearing Trackstar® UHMW Belt & Chain Guide to fight friction and reduce costs on your tile conveying lines. We offer a wide variety of standard products in stock — right here, right now, ready to go to you!

Right Here, Right Now, Ready to Go to You!


EAGLE® Green 89 T

Heavy loads? With its optimal combination of high strength, low stretch and textured surface they're no problem!

- Rough surface provides a lower coefficient of friction than 80A, 85A or 95A polyurethane belting
- Hydrolytically stabilized for superior water resistance
- Can be used with pulley diameters typically recommended for 85A materials
- Available non-reinforced or reinforced

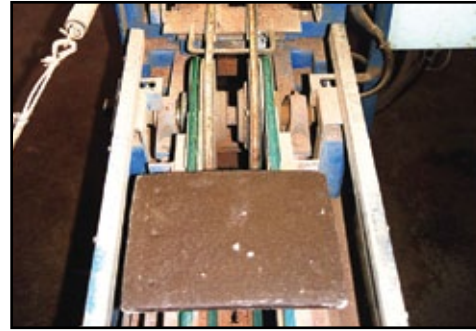

EAGLE® Hyfen 85 CXR®

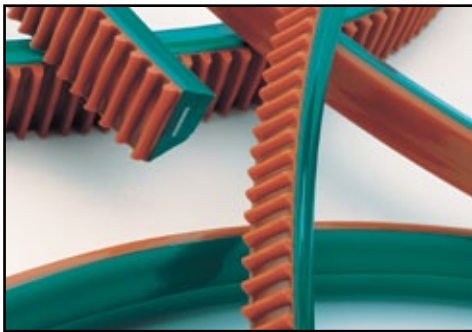


Unique dual durometer co-extruded belt offers the strength and load carrying capability of our standard product lines, with the added bonus of an ultra-grip top.

- 85A polyurethane base with a 60A co-extruded ultra-grip top surface
- Ideal for inclines and where extra grip or cushioning of products is desired
- Extruded as a single integral material; top surface will not delaminate from the base material — we guarantee it!
- Available in V- or Twin-V profiles, non-reinforced or reinforced

EAGLE® Endless Belting

We're a one-stop shop! From light, medium or heavy duty conveying to custom profiles, Fenner Drives has the right product for your application.

- The most comprehensive line of high quality non-reinforced and reinforced products in the industry; including the popular Eagle Orange 85
- Available in a wide variety of profiles and sizes; custom profiles available upon request. Some of the most common profiles include:

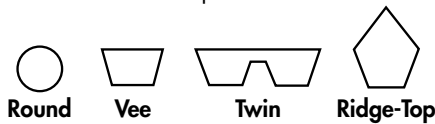


- Use a Fenner Drives Overlap or Butt Welding Kit to easily weld endless on site. For ultimate mobility or when electrical outlets are not convenient, use our cordless Freestyle Welding Kit.



At Fenner Drives, we are proud of our long history of developing innovative new products for the tile industry. Our New Product Development Engineering Team is continually developing top surfaces and other solutions to meet your tile conveying needs. Contact us to find out more!

Tired of welding? Here is your Alternative Solution...

PowerTwist Plus Zero Downtime V-Belts

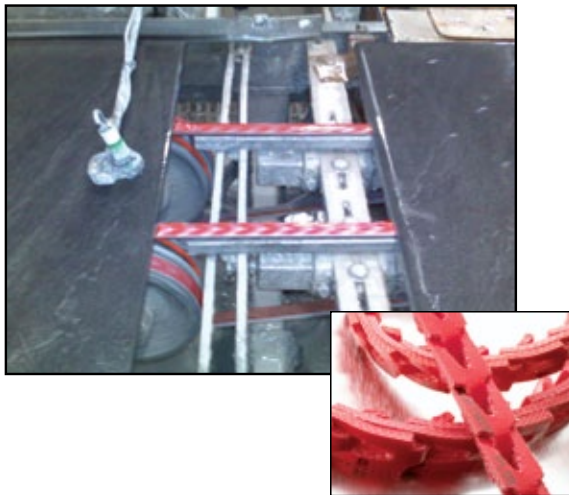

With a twist of the wrist, quickly and permanently replaces endless V-belts and flat belts on tile conveying lines.

- Quick installation — belts are easily made to the required length by hand in seconds and installed without tools and without dismantling drive system components
- High resistance to abrasion and shock loads. Unaffected by extreme temperatures [-40°F to +240°F (-40°C to +115°C)], water, steam, oil, grease and many solvents
- Permanent replacement — extremely high strength and low stretch with the same load bearing characteristics as conventional rubber V-belts
- Any Belt, Any Time!

PowerTwist SuperGrip Top

Combines the easy installation and maintenance features of PowerTwist Plus with the superior conveying capabilities of a high-grip top surface.

- All the benefits of a PVC or PU SuperGrip Top; high load-carrying capacity
- Temperature range from -22°F to +150°F (-30°C to +66°C)
- Easy installation with no tools or welders required



Count on Fenner Drives. *We've got the right product for your application.*

Fenner Drives is a proven leader in the design and manufacture of problem-solving power transmission and motion transfer components. Recognized widely for our expertise and innovation in manufacturing technology, we consistently blend reliability, quality and value in our products. As part of our commitment to provide unsurpassed technical support and service, we maintain extensive engineering, development and testing facilities.

Visit us at www.fennerdrives.com



US
www.fennerdrives.com
TEL: +1-800-243-3374
TEL: +1-717-665-2421
FAX: +1-717-665-2649

UK
www.fennerdrives.com
TEL: +44 (0)870 757 7007
TEL: +44 (0)1924 482 470
FAX: +44 (0)1924 482 471